

(SSR)


По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

vyh@nt-rt.ru || <https://vishay.nt-rt.ru/>

OPTOCOUPLER SOLID STATE RELAYS

Solid State Relays

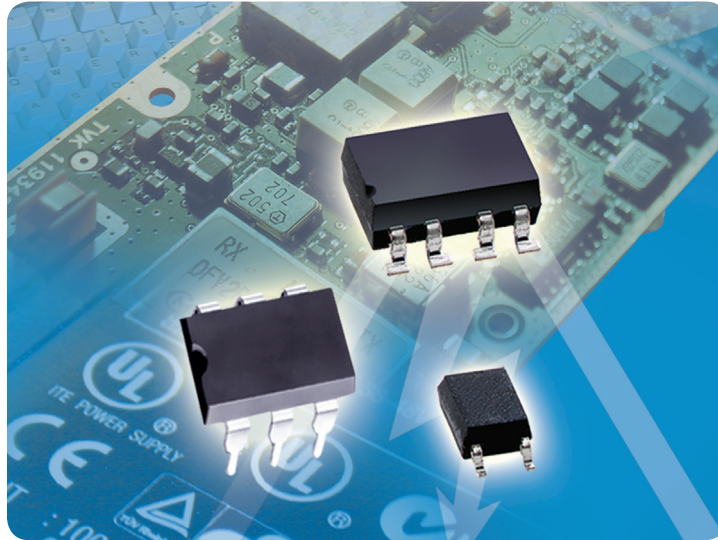

INTRODUCTION

Vishay's solid-state relays (SSRs) deliver fast switching while optically isolating and protecting equipment from damaging external high-voltage spikes. By eliminating the majority of wire bonds found in other SSRs, Vishay's monolithic structure has set the performance standard.

With no moving parts, our SSRs relays are noiseless, bounce-free and reliable, commonly replacing electromechanical relays. Used in industrial, automotive, and communication applications, all of our SSRs feature low power consumption, small packaging, and low turn-on current. Exceeding industry standards, they are approved by VDE, UL, CSA and other safety regulatory agencies.

FEATURES

- Reliable, long life, no noise, contact bounce or arcing
- Low power consumption at 75 % lower than EMR
- Low capacitance SSRs (3.5 pF)
- High-frequency SSRs (< 50 mhz)

APPLICATIONS



- Motor drive controls
- AC/DC power inverters
- PCMCIA
- Modems
- Desktop PCs and servers



OPTOCOUPLER SOLID STATE RELAYS

Optocoupler - Reliable and Versatile Solid State Relays

Part Number Coding

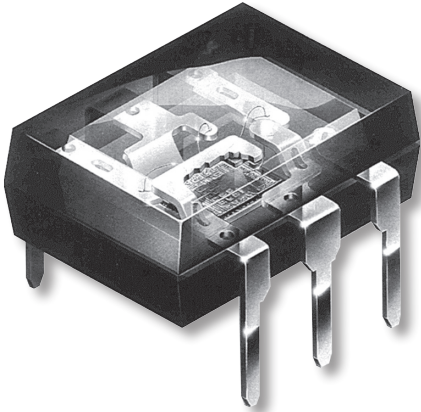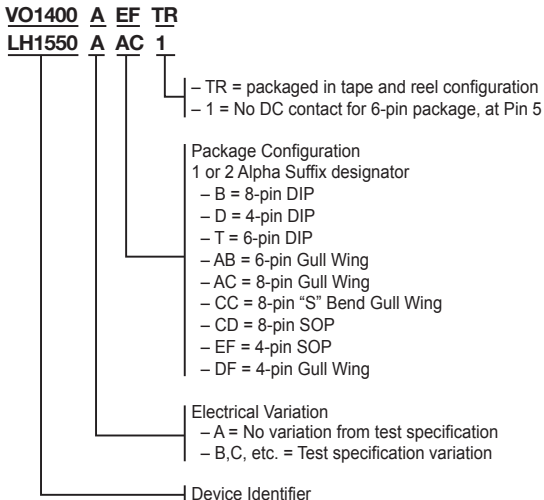

FAQs

1. What are the advantages of SSRs over electromechanical relays (EMRs)?

Reliability, long life; no noise, contact bounce or arcing, and low power consumption (75 % lower than EMR).

2. Do you have a low-cost SSR for use in place of EMRs? The 4-pin LH1546AEF/AD can be used, depending on your application requirements. Other possibilities include the LH1532FP and LH1550 products.

3. Can your SSRs meet my project's requirement for an I/O voltage of at least 2500 V to 3000 V?

Most of our SSRs provide an I/O voltage of 5300 V.

4. Do you have high speed MOSFET drivers?

Yes, we have the LH1262 and VO1263 which can be configured for best use in motor drive controls, IGBT predrivers, and AC/DC power inverters. It can also be used to customize and build your own custom SSR.

5. How do I know which agency approvals are available?

All SSRs are Underwriters Laboratories (UL) recognized. Most have Canadian Standards Association (CSA), FIMKO IEC 950 EN60950 and VDE 0884 certifications. See our website for product-specific information.

OPTOCOUPLER SOLID STATE RELAYS



Output Characteristics

Relay Type	Description		Load Voltage Max. (V)	Load Current Max. Recommended (mA)		On-Resistance Max. at 25 °C (Ω)		Current Limit (mA) Typ. at 25 °C I _F = 5 mA	Switching Time (msec) Max. at 25 °C I _F = 5 mA	
	Package	Pins		AC/DC	DC	AC/DC	DC		AC/DC	t _{on}
LH1546 ⁵	1 Form A	4	350	120	—	35	—	—	3.0	3.0
VO1400AEFTR ⁵			60	100	—	5	—	—	0.5	0.5
LH1510 ⁹	1 Form A	6	200	200	350	15	3.75	360	2.0*	2.0*
LH1518			250	155	300	20	5	280 ¹⁰	3.0	3.0
LH1500			350	150	250	25	6.25	270	2.0	2.0
LH1540			350	120	250	25	6.25	210	2.0	2.0
LH1546			350	120	—	35	—	200	3.0	3.0
LH1550 ¹			350	100	—	50	—	200	3.0	3.0
LH1535			400	120	250	25	6.25	250 ¹⁰	2.0	2.0
VO14642			60	1000	2000	0.25	0.07	—	0.8*	0.8*
LH1513			2 Form A	8	200	140	—	15	—	360
LH1503	350	110			—	25	—	270	2.5*	2.5*
LH1522	Dual 1 Form A	8	200	140	—	15	—	360	2.0*	2.0*
LH1544 ¹			200	40	—	160	—	—	0.5	0.5
LH1505			250	120	—	20	—	200	4.0	4.0
LH1520			350	110	—	25	—	270	2.0	2.0
LH1526			400	100	—	36	—	210	1.0	1.5
LH1532 ⁵			350	110	—	25	—	210	2.0	2.5
LH1533			350	70	—	50	—	200	3.0	3.0
LH1556 ⁵			350	120	—	35	—	210	3.0	3.0
LH1511	1 Form B	6	200	200	300	15	3.75	—	3.0*	3.0*
LH1501			350	150	200	25	6.25	—	3.0	3.0
LH1521	Dual 1 Form B	8	350	110	—	25	—	—	3.0	3.0
LH1523			200	140	—	15	—	—	3.0*	3.0*
LH1502 ²	1 Form A, B/C	8	350	150	—	25	—	290	6.0*	3.0*
LH1512			200	200	—	15	—	360	3.0*	3.0*
LH1529 ^{5,6,7}	1 Form A w/ Optocoupler	8	350	120	—	25	—	210	2.5	2.5
LH1262	MOSFET Driver	8	15	—	14 μA*	—	—	—	35 μs**	90 μs**
VO1263			15	—	23 μA*	—	—	—	26 μs**	73 μs**
VOM1271T ⁵		4	7.8	—	6 μA*	—	—	—	53 μs**	24 μs**

* I_F = 10 mA 1. Low capacitance SSR (3.5 pF) 4. Current through both poles operating simultaneously. Load current for individual pole ratios is higher 5. Surface mount Flat-Pack available 8. Current transfer ratio > 300 %
 ** I_F = 20 mA 2. Break-before-make operation 6. Current transfer ratio min. 33 % 7. Current transfer ratio min. 100 % 9. DC current limit 720 mA 10. AC Only
 3. High-frequency SSR (< 50 MHz)

OPTOCOUPLER SOLID STATE RELAYS



Input Characteristics

Relay Type	Package	Pins	LED Operating Current Min. (mA)				
			25 °C Test Specs	Recommended Current for 85 °C Operation	I/O Isolation Min. (V _{rms})		
LH1546 ⁵	1 Form A	4	2.0	5.0	5300		
VO1400AEFTR ⁵			0.3	3.2	1500		
LH1510 ⁹	1 Form A	6	2.0	5.0	5300		
LH1518			2.0	5.0	5300		
LH1500			2.0	5.0	5300		
LH1540			2.0	5.0	5300		
LH1546			2.0	5.0	5300		
LH1550 ¹			2.0	5.0	5300		
LH1535			2.0	5.0	5300		
VO14642			2.0	1.3	5300		
LH1513			2 Form A	8	3.0	8.0	5300
LH1503					3.0	8.0	5300
LH1522	Dual 1 Form A	8	2.0	5.0	5300		
LH1544 ¹			2.0	5.0	5300		
LH1505			2.0	5.0	5300		
LH1520			2.0	5.0	5300		
LH1526			0.5	5.0	5300		
LH1532 ⁵			2.5	5.0	5300		
LH1533			2.5	5.0	5300		
LH1556 ⁵			2.0	5.0	5300		
LH1511			1 Form B	6	2.0	5.0	3750
LH1501	2.0	5.0			3750		
LH1521	Dual 1 Form B	8	2.0	5.0	3750		
LH1523			2.0	5.0	3750		
LH1502 ²	1 Form A, B/C	8	2.0	5.0	3750		
LH1512			2.0	5.0	3750		
LH1529 ^{5,6,7}	1 Form A w/Optocoupler	8	2.0	5.0	5300		
LH1262	MOSFET Driver	8	—	—	5300		
VO1263			—	—	5300		
VOM1271T ⁵		4	—	—	4500		

- * I_F = 10 mA 1. Low capacitance SSR (3.5 pF) 4. Current through both poles operating simultaneously. Load current for individual pole ratios is higher 5. Surface mount Flat-Pack available 8. Current transfer ratio > 300 %
- ** I_F = 20 mA 2. Break-before-make operation 6. Current transfer ratio min. 33 % 9. DC current limit 720 mA
3. High-frequency SSR (< 50 MHz) 7. Current transfer ratio min. 100 % 10. AC Only

OPTOCOUPLER SOLID STATE RELAYS



Optocoupler - Reliable and Versatile Solid State Relays

DIP/MiniFlat

1 Form A*

1 Form A

1 Form A*

1 Form A

1 Form B*

1 Form B

6-Pin DIP/SMD

1 Form A/B, C

1 Form A, B, C

2 Form A*

2 Form A

Dual 1 Form A*

Dual 1 Form A

Dual 1 Form B*

Dual 1 Form B

1 Form A/Optocoupler

1 Form A/Darlington

MOSFET Driver

See data sheet for Pinout

8-Pin DIP/SMD MiniFlat

* Form A "normally open"; Form B "normally closed"

MiniFlat	4-Pin*	8-Pin*
A	0.174 (0.442)	0.374 (9.61)
B	0.180 (4.70)	0.180 (4.70)
C	0.080 (2.03)	0.080 (2.03)
D	0.100 (2.54)	0.100 (2.54)

Typical* dimensions = inches (mm)

SMD/DIP	4-Pin*	6-Pin*	8-Pin*
A	0.261 (6.62)	0.343 (8.60)	0.385 (9.78)
B	0.300 (7.62)	0.300 (7.62)	0.300 (7.62)
C	0.140 (3.35)	0.140 (3.30)	0.140 (3.30)
D	0.100 (2.54)	0.100 (2.54)	0.100 (2.54)

Typical* dimensions = inches (mm)

DIP body dimensions are the same as the SMD version presented on this drawing.

DIP body dimensions are the same as the SMD version presented on this drawing.

SOLID-STATE RELAYS

Part Number	Product Image	Package	Output	V _L max. (V)	I _L max. (mA)	I _{Fon} max. (mA)	R _{ON} max. (Ω)	R _{OFF} typ. (GΩ)	t _{on} max. (ms)	t _{off} max. (ms)	V _{iso} max. (V _{RMS})	Safety Standard
VOR2142A8, VOR2142B8		SMD-8, DIP-8	1 Form A	400	140	2	27	5000	0.5	0.2	5300	UL, VDE
VOR2121A8, VOR2121B8		SMD-8, DIP-8	1 Form A	250	200	2	15	5000	0.5	0.2	5300	UL, VDE
VOR1142M4		SOP-4	1 Form A	400	140	2	27		0.5	0.2	3750	UL, VDE
VOR1142B6, VOR1142A6		SMD-6, DIP-6	1 Form A	400	270	2	27		0.5	0.2	5300	UL, VDE
VOR1142B4		SMD-4	1 Form A	400	140	2	27		0.5	0.2	5300	UL, VDE
VOR1121A6, VOR1121B6		SMD-6, DIP-6	1 Form A	250	370	2	15	5000	0.5	0.2	5300	UL, VDE
VOM1271		SOP-4	MOSFET Driver								3750	UL, cUL, FIMKO
VO14642AT, VO14642AABTR		SMD-6, DIP-6	1 Form A	60	2000	2	0.25	n/a	0.8	0.8	5300	UL, cUL, VDE
VO1400AEF		SOP-4	1 Form A	60	100	3.2	5	n/a	0.5	0.5	3750	UL, cUL, VDE, FIMKO,
VO1263AAC, VO1263AACTR, VO1263AB		SMD-8, DIP-8	MOSFET Driver								5300	UL, VDE, BSI, CQC, FIMKO
LH1550AAB1, LH1550AAB1TR, LH1550AT1		SMD-6, DIP-6	1 Form A	350	100	2	50	5000	3	3	5300	UL
LH1546AT, LH1546AABTR		SMD-6, DIP-6	1 Form A	350	200	2	35	5000	3	3	5300	UL, cUL, BSI, FIMKO
LH1546AEF, LH1546AEFTR		SOP-4	1 Form A	350	120	2	27	850	3	3	3750	UL, cUL, BSI, FIMKO
LH1546ADF, LH1546ADFTR		SMD-4	1 Form A	350	120	2	35	5000	3	3	5300	UL
LH1540AAB, LH1540AABTR, LH1540AT		SMD-6, DIP-6	1 Form A	350	250	2	27	5000	2	2	5300	UL, VDE
LH1532AAC, LH1532AACTR, LH1532AB		SMD-8, DIP-8	1 Form A	350	120	2	27	5000	2.5	2.5	5300	UL, cUL,

Part Number	Product Image	Package	Output	V _L max. (V)	I _L max. (mA)	I _{Fon} max. (mA)	R _{ON} max. (Ω)	R _{OFF} typ. (GΩ)	t _{on} max. (ms)	t _{off} max. (ms)	V _{ISO} max. (V _{RMS})	Safety Standard
LH1526AB, LH1526AAC, LH1526AACTR		SMD-8, DIP-8	1 Form A	400	125	0.9	36	5000	1	1.5	5300	UL, cUL,
LH1525AT, LH1525AAB, LH1525AABTR		SMD-6, DIP-6	1 Form A	400	250	0.9	36	5000	1	1.5	5300	UL, cUL,
LH1522AB, LH1522AAC, LH1522AACTR		SMD-8, DIP-8	1 Form A	200	200	2	15	5000	2	2	5300	UL
LH1520AB, LH1520AAC, LH1520AACTR		SMD-8, DIP-8	1 Form A	350	140	2	27	5000	2	2	5300	UL
LH1518AAB, LH1518AABTR, LH1518AT		SMD-6, DIP-6	1 Form A	250	300	2	20	5000	3	3	5300	UL
LH1512BAC, LH1512BACTR, LH1512BB		SMD-8, DIP-8	1 Form A/B, C	200	200	2	15	5000	3	3	3750	UL, FIMKO
LH1511BAB, LH1511BABTR, LH1511BT		SMD-6, DIP-6	1 Form B	200	300	n/a	15	1.4	3	3	3750	UL,
LH1510AAB, LH1510AABTR, LH1510AT		SMD-6, DIP-6	1 Form A	200	350	2	15	5000	2	2	5300	UL
LH1505AB, LH1505AAC, LH1505AACTR		SMD-8, DIP-8	1 Form A	250	130	2	20	5000	4	4	5300	UL
LH1502BAC, LH1502BACTR, LH1502BB		SMD-8, DIP-8	1 Form A/B, C	350	150	2	25	5000	6	3	3750	UL, FIMKO
LH1501BAB, LH1501BABTR, LH1501BT		SMD-6, DIP-6	1 Form B	350	200	n/a	25	1.4	3	3	3750	UL,
LH1500AAB, LH1500AABTR, LH1500AT		SMD-6, DIP-6	1 Form A	350	250	2	27	5000	2	2	5300	UL
LH1262CAC, LH1262CACTR, LH1262CB		SMD-8, DIP-8	MOSFET Driver								5300	UL, VDE, BSI, CQC, FIMKO

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	