

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

Surface Mount Oscillator



The XOSM-531 series is an ultra miniature package clock oscillator with dimensions 5.0 mm x 3.2 mm x 1.3 mm. It is mainly used in portable PC and telecommunication devices and equipment.

FEATURES

- Size: 5.0 x 3.2 x 1.3 (mm)
- Miniature package
- Tri-state enable/disable
- HCMOS compatible
- Tape and reel
- I_R re-flow
- 1.8 V input voltage



RoHS
COMPLIANT
HALOGEN
FREE

STANDARD ELECTRICAL SPECIFICATIONS			
PARAMETER	SYMBOL	CONDITION	VALUE
Frequency range	F _O	-	1.544 MHz to 100.000 MHz
Frequency stability ⁽¹⁾		all conditions	± 25 ppm, ± 50 ppm, ± 100 ppm
Operating temperature range	T _{OPR}	-	0 °C to 70 °C
			- 40 °C to + 85 °C (option)
Storage temperature range	T _{STG}	-	- 55 °C to + 125 °C
Power supply voltage	V _{DD}	-	1.8 V ± 10 %
Aging (first year)		25 °C ± 3 °C	± 5 ppm
Supply current	I _{DD}	1.544 MHz to 9.999 MHz	6 mA max.
		10.000 MHz to 34.999 MHz	7 mA max.
		35.000 MHz to 49.999 MHz	15 mA max.
		50.000 MHz to 100.000 MHz	25 mA max.
Output symmetry	Sym	at 1/2 V _{DD}	40 %/60 % (45 %/55 % option)
Rise time	t _r	10 % V _{DD} to 90 % V _{DD}	5 ns max.
Fall time	t _f	90 % V _{DD} to 10 % V _{DD}	5 ns max.
Output voltage	V _{OH}	-	90 % V _{DD} min.
	V _{OL}	-	10 % V _{DD} max.
Output load	HCMOS load	-	30 pF max. (15 pF typ.)
Start-up time	t _s	-	10 ms max.
Pin 1, tri-state function		-	pin 1 = H or open (output active at pin 3) pin 1 = L (high impedance at pin 3)

Note

⁽¹⁾ Include: 25 °C tolerance, operating temperature range, input voltage change, aging, load change, shock vibration

DIMENSIONS in inches [millimeters]											
<table border="1"> <thead> <tr> <th>PIN</th> <th>CONNECTION</th> </tr> </thead> <tbody> <tr> <td>#1</td> <td>TRI-STATE/NC</td> </tr> <tr> <td>#2</td> <td>GND</td> </tr> <tr> <td>#3</td> <td>OUTPUT</td> </tr> <tr> <td>#4</td> <td>V_{DD}</td> </tr> </tbody> </table>		PIN	CONNECTION	#1	TRI-STATE/NC	#2	GND	#3	OUTPUT	#4	V _{DD}
PIN	CONNECTION										
#1	TRI-STATE/NC										
#2	GND										
#3	OUTPUT										
#4	V _{DD}										

Note

- A 0.01 μF bypass capacitor should be placed between V_{DD} (pin 4) and GND (pin 2) to minimize power supply line noise



ORDERING INFORMATION

XOSM-531	B	R	E	50M	e4
MODEL	FREQUENCY STABILITY AA = 0.0025 % (25 ppm) A = 0.005 % (50 ppm) B = 0.01 % (100 ppm)	OTR blank = standard R = - 40 °C to + 85 °C	ENABLE/DISABLE E = disable to tri-state	FREQUENCY/MHz	JEDEC LEAD (Pb)-FREE standard

GLOBAL PART NUMBER

X	O	6	1	C	T	E	A	N	A	5	0	M
MODEL				FREQUENCY STABILITY	OTR	ENABLE/DISABLE	PACKAGE CODE	OPTIONS		FREQUENCY		

GLOBAL PART NUMBERING OPTIONS

X	O	5	7	C	T	E	C	N	A	4	0	M
MODEL NUMBER				FREQUENCY STABILITY	OPERATING TEMPERATURE (OTR)	ENABLE/DISABLE	PACKAGE CODE	OPTION		FREQUENCY		
XO63 = XOSM-533 XO62 = XOSM-532 XO61 = XOSM-531 XO57 = XOSM-57 XO37 = XOSM-573 XO27 = XOSM-572 XO17 = XOSM-571				C = 0.01 % (100 ppm) D = 0.005 % (50 ppm) E = 0.0025 % (25 ppm)	T = 0 °C to + 70 °C R = - 40 °C to + 85 °C	E = Disable to tristate	Tape and reel H = RF7 Bulk A = B04 (XO63, XO62, XO61) C = D06 (XO57, XO37, XO27, XO17)	NA = No additional options 60 = 45/55 symmetry Contact factory for all other options		4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12 288 MHz M is used as decimal place holder in frequency		
Example: XO57CTECNA40M												

PART MARKING

Line 1:	M28_XXXXX (part number)
Line 2:	XX.XXXXM (frequency)
Line 3:	yywwvv (date/factory code)

Surface Mount Oscillator



The XOSM-532 series is an ultra miniature package clock oscillator with dimensions 5.0 mm x 3.2 mm x 1.3 mm. It is mainly used in portable PC and telecommunication devices and equipment.

FEATURES

- Size: 5.0 x 3.2 x 1.3 (mm)
- Miniature package
- Tri-state enable/disable
- HCMOS compatible
- Tape and reel
- I_R re-flow
- 2.5 V input voltage




RoHS
COMPLIANT
HALOGEN
FREE

STANDARD ELECTRICAL SPECIFICATIONS			
PARAMETER	SYMBOL	CONDITION	VALUE
Frequency range	F _O	-	1.544 MHz to 100.000 MHz
Frequency stability ⁽¹⁾		all conditions	± 25 ppm, ± 50 ppm, ± 100 ppm
Operating temperature range	T _{OPR}	-	0 °C to 70 °C
			- 40 °C to + 85 °C (option)
Storage temperature range	T _{STG}	-	- 55 °C to + 125 °C
Power supply voltage	V _{DD}	-	2.5 V ± 10 %
Aging (first year)		25 °C ± 3 °C	± 5 ppm
Supply current	I _{DD}	1.544 MHz to 9.999 MHz	7 mA max.
		10.000 MHz to 34.999 MHz	8 mA max.
		35.000 MHz to 49.999 MHz	20 mA max.
		50.000 MHz to 100.000 MHz	30 mA max.
Output symmetry	Sym	at 1/2 V _{DD}	40 %/60 % (45 %/55 % option)
Rise time	t _r	10 % V _{DD} to 90 % V _{DD}	6 ns max.
Fall time	t _f	90 % V _{DD} to 10 % V _{DD}	6 ns max.
Output voltage	V _{OH}	-	90 % V _{DD} min.
	V _{OL}	-	10 % V _{DD} max.
Output load	HCMOS load	-	30 pF max. (15 pF typ.)
Start-up time	t _s	-	10 ms max.
Pin 1, tri-state function		-	pin 1 = H or open (output active at pin 3) pin 1 = L (high impedance at pin 3)

Note

⁽¹⁾ Include: 25 °C tolerance, operating temperature range, input voltage change, aging, load change, shock vibration

DIMENSIONS in inches [millimeters]

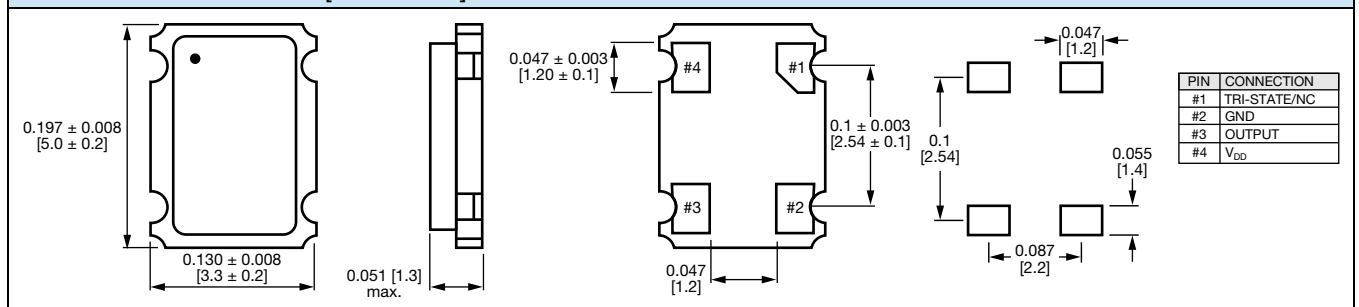

Note


- A 0.01 µF bypass capacitor should be placed between V_{DD} (pin 4) and GND (pin 2) to minimize power supply line noise



ORDERING INFORMATION

XOSM-532	B	R	E	50M	e4
MODEL	FREQUENCY STABILITY AA = 0.0025 % (25 ppm) A = 0.005 % (50 ppm) B = 0.01 % (100 ppm) standard	OTR blank = standard R = - 40 °C to + 85 °C	ENABLE/DISABLE E = disable to tri-state	FREQUENCY/MHz	JEDEC LEAD (Pb)-FREE standard

GLOBAL PART NUMBER

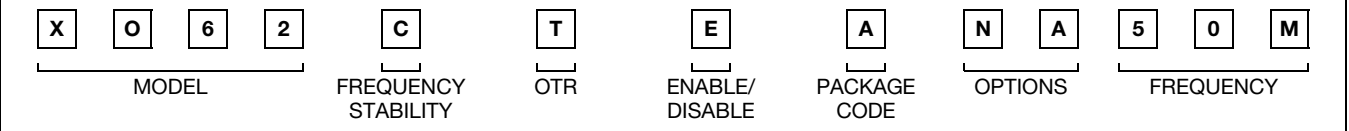

GLOBAL PART NUMBERING OPTIONS

X	O	5	7	C	T	E	C	N	A	4	0	M
MODEL NUMBER				FREQUENCY STABILITY	OPERATING TEMPERATURE (OTR)	ENABLE/DISABLE	PACKAGE CODE	OPTION		FREQUENCY		
XO63 = XOSM-533 XO62 = XOSM-532 XO61 = XOSM-531 XO57 = XOSM-57 XO37 = XOSM-573 XO27 = XOSM-572 XO17 = XOSM-571				C = 0.01 % (100 ppm) D = 0.005 % (50 ppm) E = 0.0025 % (25 ppm)	T = 0 °C to + 70 °C R = - 40 °C to + 85 °C	E = Disable to tristate	Tape and reel H = RF7 Bulk A = B04 (XO63, XO62, XO61) C = D06 (XO57, XO37, XO27, XO17)	NA = No additional options 60 = 45/55 symmetry Contact factory for all other options		4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12 288 MHz M is used as decimal place holder in frequency		
<p>Example: XO57CTECNA40M</p>												

PART MARKING

Line 1:	M2808XXXXX (part number)
Line 2:	XX.XXXXXM (frequency)
Line 3:	yywwwv (date/factory code)

Surface Mount Oscillator



The XOSM-533 series is an ultra miniature package clock oscillator with dimensions 5.0 mm x 3.2 mm x 1.3 mm. It is mainly used in portable PC and telecommunication devices and equipment.

FEATURES

- Size: 5.0 x 3.2 x 1.3 (mm)
- Miniature package
- Tri-state enable/disable
- HCMOS compatible
- Tape and reel
- I_R re-flow
- 3.3 V input voltage



RoHS
COMPLIANT
HALOGEN
FREE


STANDARD ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE
Frequency range	F _O	-	1.544 MHz to 100.000 MHz
Frequency stability ⁽¹⁾		All conditions	± 25 ppm, ± 50 ppm, ± 100 ppm
Operating temperature range	T _{OPR}	-	0 °C to 70 °C
			-40 °C to +85 °C (option)
Storage temperature range	T _{STG}	-	-55 °C to +125 °C
Power supply voltage	V _{DD}	-	3.3 V ± 10 %
Aging (first year)		25 °C ± 3 °C	± 5 ppm
Supply current	I _{DD}	1.544 MHz to 9.999 MHz	8 mA max.
		10.000 MHz to 34.999 MHz	10 mA max.
		35.000 MHz to 49.999 MHz	25 mA max.
		50.000 MHz to 100.000 MHz	35 mA max.
Output symmetry	Sym	at 1/2 V _{DD}	40 %/60 % (45 %/55 % option)
Rise time	t _r	10 % V _{DD} to 90 % V _{DD}	7 ns max.
Fall time	t _f	90 % V _{DD} to 10 % V _{DD}	7 ns max.
Output voltage	V _{OH}	-	90 % V _{DD} min.
	V _{OL}	-	10 % V _{DD} max.
Output load	HCMOS load	-	30 pF max. (15 pF typ.)
Start-up time	t _s	-	10 ms max.
Pin 1, tri-state function		-	Pin 1 = H or open (output active at pin 3) Pin 1 = L (high impedance at pin 3)

Note

⁽¹⁾ Include: 25 °C tolerance, operating temperature range, input voltage change, aging, load change, shock vibration

DIMENSIONS in inches [millimeters]

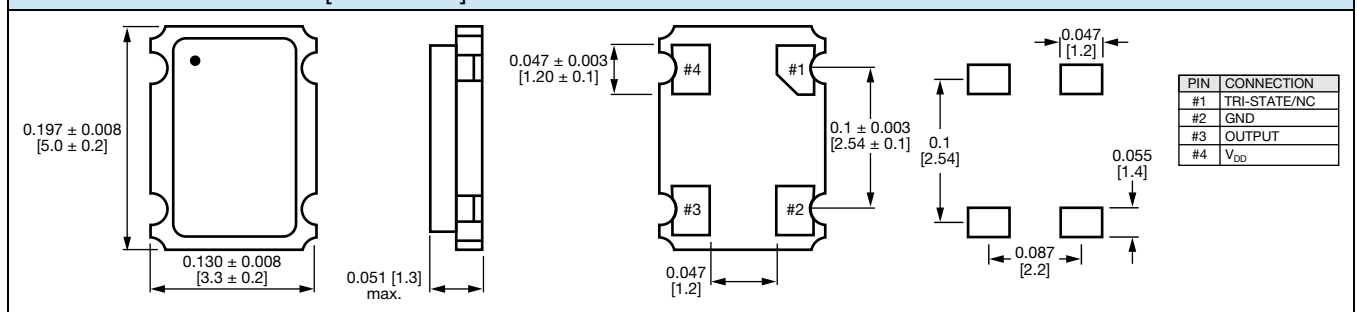

Note


- A 0.01 µF bypass capacitor should be placed between V_{DD} (pin 4) and GND (pin 2) to minimize power supply line noise



ORDERING INFORMATION

XOSM-533	B	R	E	50M	e4
MODEL	FREQUENCY STABILITY AA = 0.0025 % (25 ppm) A = 0.005 % (50 ppm) B = 0.01 % (100 ppm) standard	OTR Blank = standard R = -40 °C to +85 °C	ENABLE/DISABLE E = disable to tri-state	FREQUENCY/MHz	JEDEC® LEAD (Pb)-FREE Standard

GLOBAL PART NUMBER

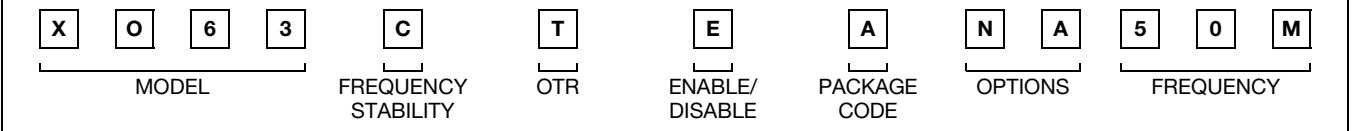


GLOBAL PART NUMBERING OPTIONS

X	O	5	7	C	T	E	C	N	A	4	0	M
MODEL NUMBER				FREQUENCY STABILITY	OPERATING TEMPERATURE (OTR)	ENABLE/DISABLE	PACKAGE CODE	OPTION		FREQUENCY		
XO63 = XOSM-533 XO62 = XOSM-532 XO61 = XOSM-531 XO57 = XOSM-57 XO37 = XOSM-573 XO27 = XOSM-572 XO17 = XOSM-571				C = 0.01 % (100 ppm) D = 0.005 % (50 ppm) E = 0.0025 % (25 ppm)	T = 0 °C to +70 °C R = -40 °C to +85 °C	E = disable to tristate	Tape and reel H = RF7 Bulk A = B04 (XO63, XO62, XO61) C = D06 (XO57, XO37, XO27, XO17)	NA = no additional options 60 = 45/55 symmetry Contact factory for all other options		4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12 288 MHz M is used as decimal place holder in frequency		
Example: XO57CTECNA40M												

PART MARKING

Line 1:	M2807XXXXX (part number)
Line 2:	XX.XXXXXM (frequency)
Line 3:	yywwwv (date/factory code)

Surface Mount Oscillator



The XOSM-57 series is an ultra miniature package clock oscillator with dimensions 7.0 mm x 5.0 mm x 1.9 mm. It is mainly used in portable PC and telecommunication devices and equipment.

FEATURES

- Size: 7.0 x 5.0 x 1.9 (mm)
- Miniature package
- Tri-state enable/disable
- TTL/HCMOS compatible
- Tape and reel
- I_R re-flow
- 5 V input voltage



RoHS
COMPLIANT
HALOGEN
FREE


STANDARD ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE
Frequency range	F _O	-	1.500 MHz to 100.000 MHz
Frequency stability ⁽¹⁾		all conditions	± 25 ppm, ± 50 ppm, ± 100 ppm
Operating temperature range	T _{OPR}	-	0 °C to 70 °C
			- 40 °C to + 85 °C (option)
Storage temperature range	T _{STG}	-	- 55 °C to + 125 °C
Power supply voltage	V _{DD}	-	5.0 V ± 10 %
Aging (first year)		25 °C ± 3 °C	± 5 ppm
Supply current	I _{DD}	1.500 MHz to 20.000 MHz	20 mA max.
		20.001 MHz to 50.000 MHz	35 mA max.
		30.001 MHz to 100.000 MHz	45 mA max.
Output symmetry	Sym	at 1/2 V _{DD}	40 %/60 % (45 %/55 % option)
Rise/fall time	t _r /t _f	1.500 MHz to 67.000 MHz	10 ns
		67.001 MHz to 100.000 MHz	3 ns
Output voltage	V _{OH}	-	90 % V _{DD} min.
	V _{OL}	-	10 % V _{DD} max.
Output load		1.500 MHz to 67.000 MHz	10 TTL or 50 pF max.
		67.001 MHz to 100.000 MHz	15 pF max.
Start-up time	t _s	-	10 ms max.
Pin 1, tri-state function		-	pin 1 = H or open (output active at pin 3) pin 1 = L (high impedance at pin 3)

Note

⁽¹⁾ Include: 25 °C tolerance, operating temperature range, input voltage change, aging, load change, shock vibration

DIMENSIONS in inches [millimeters]

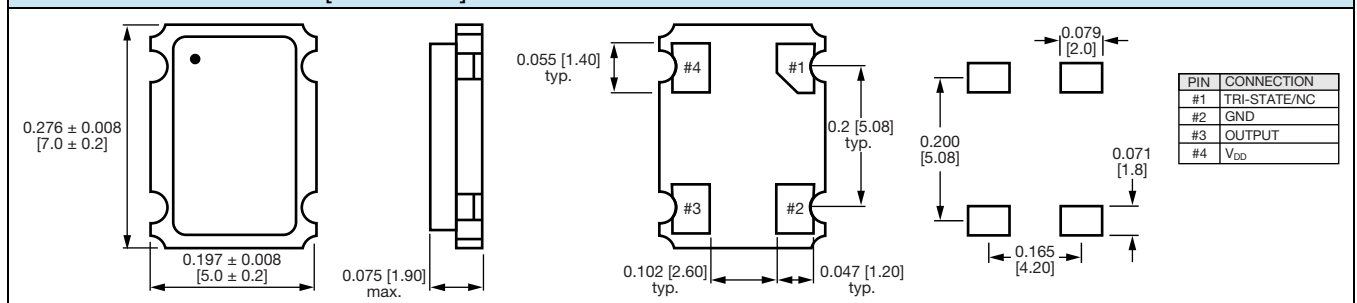

Note


- A 0.01 µF bypass capacitor should be placed between V_{DD} (pin 4) and GND (pin 2) to minimize power supply line noise




ORDERING INFORMATION

XOSM-57	B	R	E	50M	e4
MODEL	FREQUENCY STABILITY AA = 0.0025 % (25 ppm) A = 0.005 % (50 ppm) B = 0.01 % (100 ppm) standard	OTR blank = standard R = - 40 °C to + 85 °C	ENABLE/DISABLE E = disable to tri-state	FREQUENCY/MHz	JEDEC LEAD (Pb)-FREE standard

GLOBAL PART NUMBER



GLOBAL PART NUMBERING OPTIONS

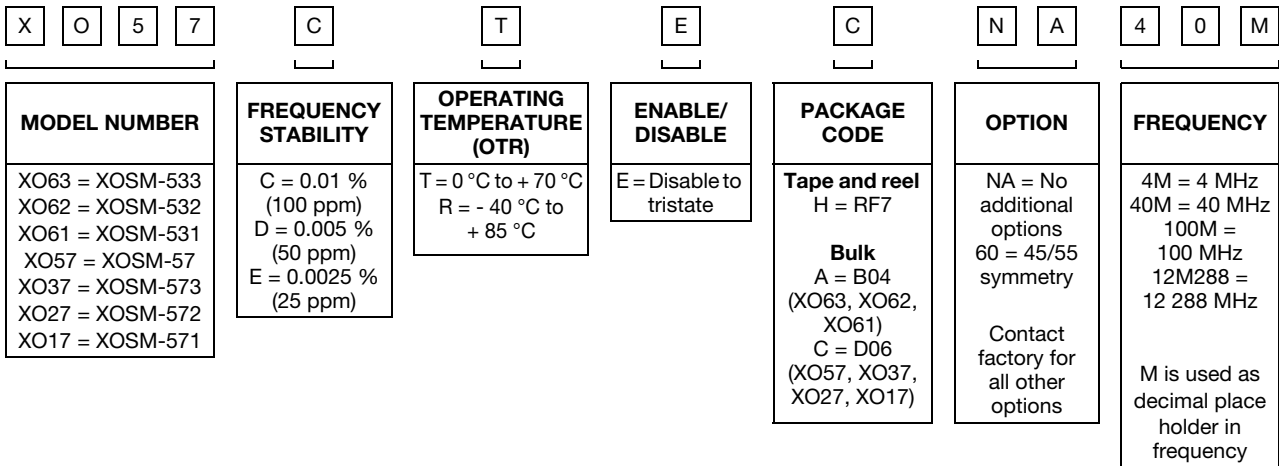


Example: XO57CTECNA40M

PART MARKING

- Line 1: M2804XXXXX (part number)
- Line 2: XX.XXXXXM (frequency)
- Line 3: yywwwv (date/factory code)

Surface Mount Oscillator



The XOSM-571 series is an ultra miniature package clock oscillator with dimensions 7.0 mm x 5.0 mm x 1.9 mm. It is mainly used in portable PC and telecommunication devices and equipment.

FEATURES

- Size: 7.0 x 5.0 x 1.9 (mm)
- Miniature package
- Tri-state enable/disable
- HCMOS compatible
- Tape and reel
- I_R re-flow
- 1.8 V input voltage



RoHS
COMPLIANT
HALOGEN
FREE


STANDARD ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE
Frequency range	F _O	-	1.000 MHz to 70.000 MHz
Frequency stability ⁽¹⁾		all conditions	± 25 ppm, ± 50 ppm, ± 100 ppm
Operating temperature range	T _{OPR}	-	0 °C to 70 °C
			- 40 °C to + 85 °C (option)
Storage temperature range	T _{STG}	-	- 55 °C to + 125 °C
Power supply voltage	V _{DD}	-	1.8 V ± 10 %
Aging (first year)		25 °C ± 3 °C	± 5 ppm
Supply current	I _{DD}	1.000 MHz to 70.000 MHz	20 mA max.
Output symmetry	Sym	at 1/2 V _{DD}	40 %/60 % (45 %/55 % option)
Rise/fall time	t _r /t _f	1.000 MHz to 35.328 MHz	10 ns
		35.329 MHz to 70.000 MHz	4 ns
Output voltage	V _{OH}	-	90 % V _{DD} min.
	V _{OL}	-	10 % V _{DD} max.
Output load		-	10 TTL or 30 pF
Start-up time	t _s	-	10 ms max.
Pin 1, tri-state function		-	pin 1 = H or open (output active at pin 3) pin 1 = L (high impedance at pin 3)

Note

⁽¹⁾ Include: 25 °C tolerance, operating temperature range, input voltage change, aging, load change, shock vibration

DIMENSIONS in inches [millimeters]

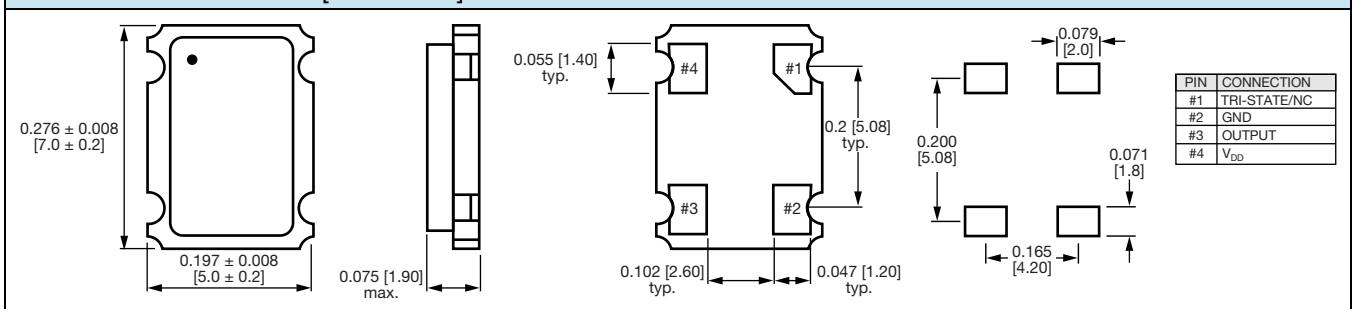

Note


- A 0.01 μF bypass capacitor should be placed between V_{DD} (pin 4) and GND (pin 2) to minimize power supply line noise



ORDERING INFORMATION

XOSM-571	B	R	E	50M	e4
MODEL	FREQUENCY STABILITY AA = 0.0025 % (25 ppm) A = 0.005 % (50 ppm) B = 0.01 % (100 ppm) standard	OTR blank = standard R = - 40 °C to + 85 °C	ENABLE/DISABLE E = disable to tri-state	FREQUENCY/MHz	JEDEC LEAD (Pb)-FREE standard

GLOBAL PART NUMBER

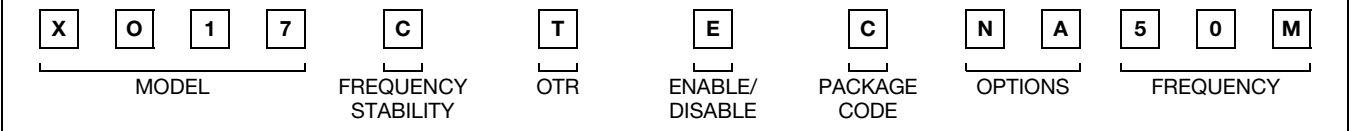


GLOBAL PART NUMBERING OPTIONS

X	O	5	7	C	T	E	C	N	A	4	0	M
MODEL NUMBER				FREQUENCY STABILITY	OPERATING TEMPERATURE (OTR)	ENABLE/DISABLE	PACKAGE CODE	OPTION		FREQUENCY		
XO63 = XOSM-533 XO62 = XOSM-532 XO61 = XOSM-531 XO57 = XOSM-57 XO37 = XOSM-573 XO27 = XOSM-572 XO17 = XOSM-571				C = 0.01 % (100 ppm) D = 0.005 % (50 ppm) E = 0.0025 % (25 ppm)	T = 0 °C to + 70 °C R = - 40 °C to + 85 °C	E = Disable to tristate	Tape and reel H = RF7 Bulk A = B04 (XO63, XO62, XO61) C = D06 (XO57, XO37, XO27, XO17)	NA = No additional options 60 = 45/55 symmetry Contact factory for all other options		4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12 288 MHz M is used as decimal place holder in frequency		
Example: XO57CTECNA40M												

PART MARKING

Line 1:	M28_XXXXX (part number)
Line 2:	XX.XXXXM (frequency)
Line 3:	yywwwv (date/factory code)

Surface Mount Oscillator



The XOSM-572 series is an ultra miniature package clock oscillator with dimensions 7.0 mm x 5.0 mm x 1.9 mm. It is mainly used in portable PC and telecommunication devices and equipment.

FEATURES

- Size: 7.0 x 5.0 x 1.9 (mm)
- Miniature package
- Tri-state enable/disable
- HCMOS compatible
- Tape and reel
- I_R re-flow
- 2.5 V input voltage



RoHS
COMPLIANT
HALOGEN
FREE


STANDARD ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE
Frequency range	F _O	-	1.000 MHz to 100.000 MHz
Frequency stability ⁽¹⁾		all conditions	± 25 ppm, ± 50 ppm, ± 100 ppm
Operating temperature range	T _{OPR}	-	0 °C to 70 °C
			- 40 °C to + 85 °C (option)
Storage temperature range	T _{STG}	-	- 55 °C to + 125 °C
Power supply voltage	V _{DD}	-	2.5 V ± 10 %
Aging (first year)		25 °C ± 3 °C	± 5 ppm
Supply current	I _{DD}	1.000 MHz to 100.000 MHz	30 mA max.
Output symmetry	Sym	at 1/2 V _{DD}	40 %/60 % (45 %/55 % option)
Rise/fall time	t _r /t _f	1.000 MHz to 100.000 MHz	6 ns max.
Output voltage	V _{OH}	-	90 % V _{DD} min.
	V _{OL}	-	10 % V _{DD} max.
Output load		-	10 TTL or 15 pF
Start-up time	t _s	-	10 ms max.
Pin 1, tri-state function		-	pin 1 = H or open (output active at pin 3) pin 1 = L (high impedance at pin 3)

Note

⁽¹⁾ Include: 25 °C tolerance, operating temperature range, input voltage change, aging, load change, shock vibration

DIMENSIONS in inches [millimeters]

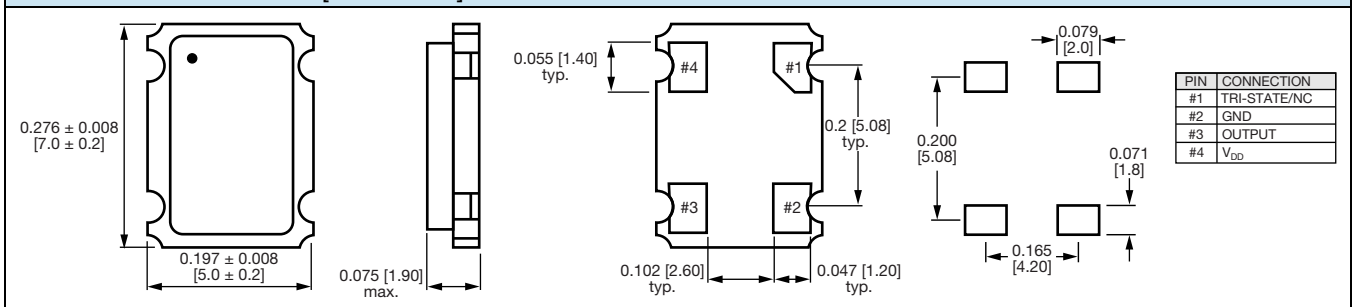

Note


- A 0.01 μF bypass capacitor should be placed between V_{DD} (pin 4) and GND (pin 2) to minimize power supply line noise



ORDERING INFORMATION

XOSM-572	B	R	E	50M	e4
MODEL	FREQUENCY STABILITY AA = 0.0025 % (25 ppm) A = 0.005 % (50 ppm) B = 0.01 % (100 ppm) standard	OTR blank = Standard R = - 40 °C to + 85 °C	ENABLE/DISABLE E = disable to tri-state	FREQUENCY/MHz	JEDEC LEAD (Pb)-FREE standard

GLOBAL PART NUMBER

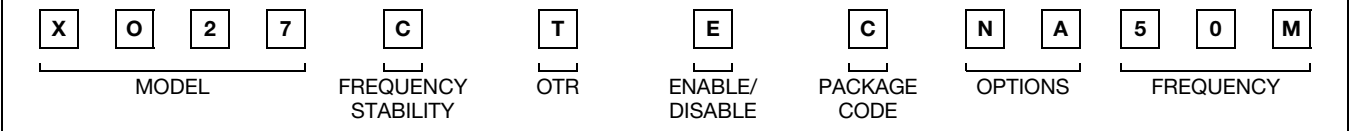

GLOBAL PART NUMBERING OPTIONS


X	O	5	7	C	T	E	C	N	A	4	0	M
MODEL NUMBER				FREQUENCY STABILITY	OPERATING TEMPERATURE (OTR)	ENABLE/DISABLE	PACKAGE CODE	OPTION		FREQUENCY		
XO63 = XOSM-533 XO62 = XOSM-532 XO61 = XOSM-531 XO57 = XOSM-57 XO37 = XOSM-573 XO27 = XOSM-572 XO17 = XOSM-571				C = 0.01 % (100 ppm) D = 0.005 % (50 ppm) E = 0.0025 % (25 ppm)	T = 0 °C to + 70 °C R = - 40 °C to + 85 °C	E = Disable to tristate	Tape and reel H = RF7 Bulk A = B04 (XO63, XO62, XO61) C = D06 (XO57, XO37, XO27, XO17)	NA = No additional options 60 = 45/55 symmetry Contact factory for all other options		4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12 288 MHz M is used as decimal place holder in frequency		

Example: XO57CTECNA40M

PART MARKING

Line 1:	M2805XXXXX (part number)
Line 2:	XX.XXXXXM (frequency)
Line 3:	yywwwv (date/factory code)

Surface Mount Oscillator



The XOSM-573 series is an ultra miniature package clock oscillator with dimensions 7.0 mm x 5.0 mm x 1.9 mm. It is mainly used in portable PC and telecommunication devices and equipment

FEATURES

- Size: 7.0 x 5.0 x 1.9 (mm)
- Miniature package
- Tri-state enable/disable
- TTL/HCMOS compatible
- Tape and reel
- I_R re-flow
- 3.3 V input voltage



RoHS
COMPLIANT
HALOGEN
FREE


STANDARD ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE
Frequency range	F _O	-	1.500 MHz to 100.000 MHz
Frequency stability ⁽¹⁾		all conditions	± 25 ppm, ± 50 ppm, ± 100 ppm
Operating temperature range	T _{OPR}	-	0 °C to 70 °C
			- 40 °C to + 85 °C (option)
Storage temperature range	T _{STG}	-	- 55 °C to + 125 °C
Power supply voltage	V _{DD}	-	3.3 V ± 10 %
Aging (first year)		25 °C ± 3 °C	± 5 ppm
Supply current	I _{DD}	1.500 MHz to 20.000 MHz	10 mA max.
		20.001 MHz to 50.000 MHz	20 mA max.
		50.001 MHz to 67.000 MHz	30 mA max.
		67.001 MHz to 100.000 MHz	55 mA max.
Output symmetry	Sym	at ½ V _{DD}	40 %/60 % (45 %/55 % option)
Rise/fall time	t _r /t _f	1.500 MHz to 50.000 MHz	6 ns
		50.001 MHz to 80.000 MHz	4 ns
		80.001 MHz to 100.000 MHz	2 ns
Output voltage	V _{OH}	-	90 % V _{DD} min.
	V _{OL}	-	10 % V _{DD} max.
Output load		-	2 TTL or 15 pF
Start-up time	t _s	-	10 ms max.
Pin 1, tri-state function		-	pin 1 = H or open (output active at pin 3) pin 1 = L (high impedance at pin 3)

Note

⁽¹⁾ Include: 25 °C tolerance, operating temperature range, input voltage change, aging, load change, shock and vibration

DIMENSIONS in inches [millimeters]

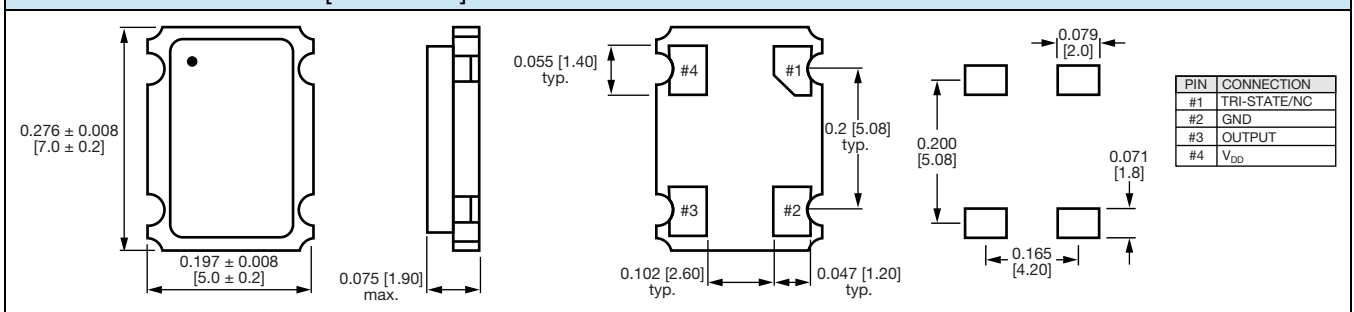

Note


- A 0.01 µF bypass capacitor should be placed between V_{DD} (pin 4) and GND (pin 2) to minimize power supply line noise



ORDERING INFORMATION

XOSM-573	B	R	E	50M	e4
MODEL	FREQUENCY STABILITY	OTR	ENABLE/DISABLE	FREQUENCY/MHz	JEDEC LEAD (Pb)-FREE
	AA = 0.0025 % (25 ppm) A = 0.005 % (50 ppm) B = 0.01 % (100 ppm) standard	blank = standard R = - 40 °C to + 85 °C	E = disable to tri-state		standard

GLOBAL PART NUMBER

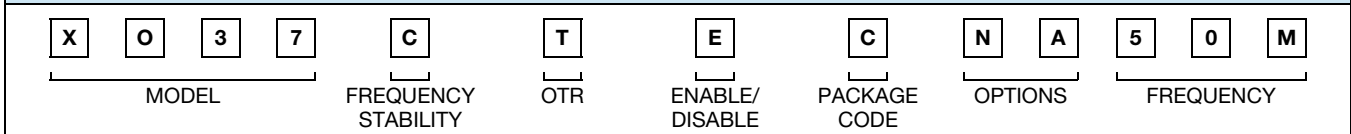

GLOBAL PART NUMBERING OPTIONS

X	O	5	7	C	T	E	C	N	A	4	0	M
MODEL NUMBER	FREQUENCY STABILITY	OPERATING TEMPERATURE (OTR)		ENABLE/DISABLE	PACKAGE CODE	OPTION	FREQUENCY					
XO63 = XOSM-533 XO62 = XOSM-532 XO61 = XOSM-531 XO57 = XOSM-57 XO37 = XOSM-573 XO27 = XOSM-572 XO17 = XOSM-571	C = 0.01 % (100 ppm) D = 0.005 % (50 ppm) E = 0.0025 % (25 ppm)	T = 0 °C to + 70 °C R = - 40 °C to + 85 °C		E = Disable to tristate	Tape and reel H = RF7 Bulk A = B04 (XO63, XO62, XO61) C = D06 (XO57, XO37, XO27, XO17)	NA = No additional options 60 = 45/55 symmetry Contact factory for all other options	4M = 4 MHz 40M = 40 MHz 100M = 100 MHz 12M288 = 12 288 MHz M is used as decimal place holder in frequency					
Example: XO57CTECNA40M												

PART MARKING

Line 1:	M2809XXXXX (part number)
Line 2:	XX.XXXXM (frequency)
Line 3:	yywwvv (date/factory code)

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	